


### WPX SERIES

Battery-Operated Controller


Easier, tougher and longer lasting battery-operated controller.

#### FEATURES

- Convenient, durable option for providing uninterrupted irrigation when AC-power is not available.
- Waterproof case ensures long life even when installed in a valve box.
- IP68 certified for protection against dust and water intrusion.
- Common programming features are easily accessed on one screen, making programming quick and easy.
- At-a-glance programming eliminates confusion by showing the run-time, start-times and watering days for each zone.
- Dedicated manual watering button for easy operation.
- Automatic zone-stacking ensures that only one valve irrigates at a time. If zones are scheduled to water at the same time, the WPX will automatically irrigate the lower number zone first.
- Contractor Rapid Programming™ automatically copies the start times and watering days from zone 1 to all remaining zones at initial setup.
- Run times, start times and watering days are customizable by zone.
- Contractor Default™ save/restore.
- Rain sensor bypass for all zones or bypass by individual zone.
- Manually water ALL zones or SINGLE zone on demand.
- One-touch manual start.
- Large LCD display with easy to navigate user interface.
- Sensor input with bypass override.
- Master valve/pump-start circuit (multi-zone units only).
- Non-volatile (100-year) program memory.
- Mounts in valve box using solenoid mounting bracket or using two screws affixed to the valve box.



Optional wall mount bracket

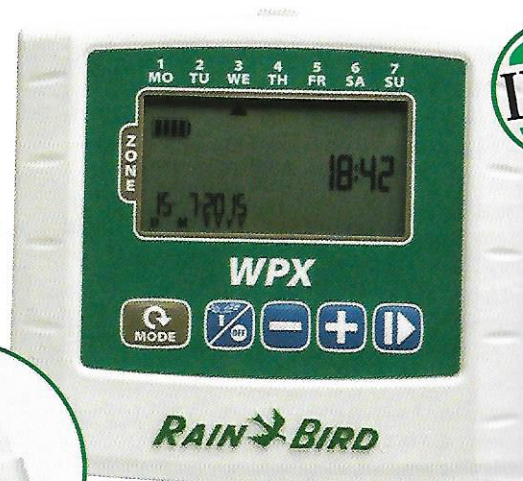

#### OPERATING SPECIFICATIONS

- Operates for one full year using one 9-volt alkaline battery, or two years with two 9-volt alkaline batteries.
- Station Timing: 1 to 240 minutes per start time.
- 6 independent start times per zone
- 4 watering day options per zone: Custom days of week, Cyclic (every 1 to 30 days), ODD calendar days, and EVEN calendar days.
- Delay watering: 1 to 9 days
- Seasonal adjust: 10% to 200%

#### ACCESSORIES

- Solenoid mounting bracket for easy mounting on a valve.
- Rubber cover protects the controller face.
- Optional: Wall mount bracket.

#### CERTIFICATIONS

- cULus, FCC, IC, CE, RCM (AMCA), IP68, RoHS

#### DIMENSIONS

##### Controller Dimensions

Width: 13,59 cm  
Height: 10,26 cm  
Depth: 6,15 cm  
Weight: 907 g

##### LCD Screen Size

Width: 5,72 cm  
Height: 3,18 cm

#### Optional Wall Mount Dimensions

Width: 10,76 cm  
Height: 17,60 cm  
Depth: 4,99 cm  
Weight: 107 g

#### MODELS

WPX1 (P/N: F48311): 1-Zone Controller  
WPX2 (P/N: F48312): 2-Zone Controller  
WPX4 (P/N: F48314): 4-Zone Controller  
WPX6 (P/N: F48316): 6-Zone Controller  
WPX1SOL (P/N: F48321): 1-Zone + 9V Solenoid  
WPX1DVKIT (P/N: F48331): 1-Zone + 1" DV Valve  
9VMOUNT (P/N: F48340): Wall-mount kit

